

Technical Specifications (continued)

Construction

Lens:

Prismatic Acrylic Lens

Mounting:

Surface mount. Can be mounted with v-hooks (ordered separately).

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Other

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Equivalency:

Equivalent to (1) F32T8

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

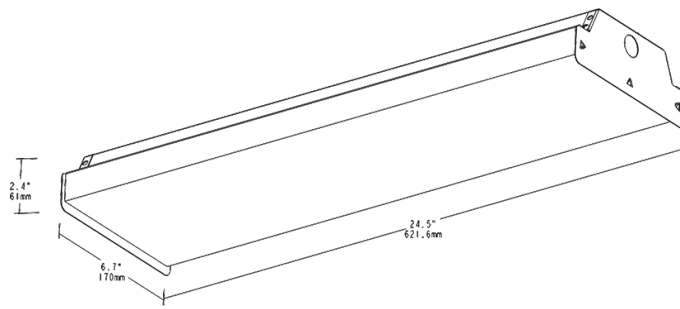

Features

Affordable, easy to use LED wrap fixture

0-10V dimming standard

50,000-Hour LED lifespan

Ordering Matrix

Family	Length	Wattage	Color Temp	Finish	Voltage	Control Options	Options
GUSJR	2 4	20 27 40	840 850 = 5000K (Cool) 840 = 4000K (Neutral) 835 = 3500K (Warm Neutral)	W = White	U = 120-277V, 0-10V Dimming	Blank = No Option /LC = Lightcloud® Controller	Blank = No Option /E2 = 120-277V Battery Backup* /TW = Through Wire

* Only available in 4FT (27W or 40W)