

PLCK-UNL PLCK-1



Display size
up to 90"



Max load
150lb (68.2kg)

SMARTMOUNT.

Ceiling Mounts with 1.5" NPS Coupler


FOR UP TO 90" DISPLAYS

The SmartMount® PLCK Ceiling Mounts utilize 1.5" NPT extension pipes for versatility, support, and connection. The 1.5" NPT threaded pipes make it simple to customize each mount to your specific application. The PLCK-1 kit combines the PLCKM-2 tilt box, EXT018 1.5" NPT extension column, and a 1.5' NPS coupler, to easily retrofit existing installations. When combined with Peerless-AV's universal I-shaped or dedicated display adaptor, it provides the perfect combination for retrofitting flat panel ceiling mounts in sports facilities, airports, lobbies, or retail environments.

Additional Features

- ✓ Includes a 1.5" NPS threaded coupling enabling retrofit to existing 1.5" NPT or NPS connections
- ✓ -5° to 20° adjustable tilt and 360° swivel
- ✓ Peerless-AV EXT018 Aluminum Extension Column included, providing a 17.44" drop
- ✓ Simple hook-on display installation
- ✓ PLCK-UNL's Universal I-Shaped Adaptor fits displays with mounting holes up to 600 x 400mm
- ✓ VESA® 75 x 75 and 100 x 100mm mounting pattern provided with PLCK-1 (display mounting hardware ACC918 not included)
- ✓ Additional display mounting adaptor plates available for PLCK-1 (sold separately)
- ✓ Universal I-Shaped Adaptor mounts display in landscape or portrait orientation with PLCK-UNL
- ✓ Integrated cable management protects, contains and conceals cables for a clean, professional installation

For added convenience, the PLCK-UNL comes with Peerless-AV's PLP-UNL Universal I-Shaped Adaptor, making it even easier to complete your installation

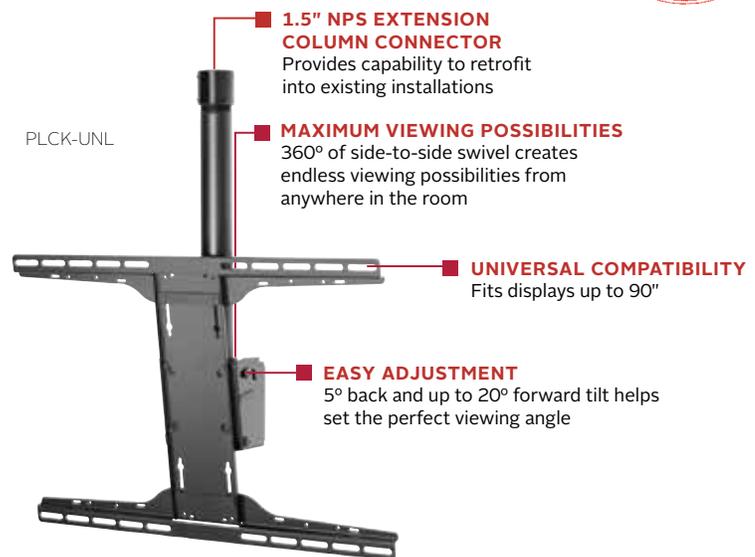


PLCK-1
(Display adaptor
sold separately)



VESA® 200 x 100 and
200 x 200mm adaptor plate
ACC450, sold separately



Universal I-Shaped Adaptor
plate PLP-UNM, sold
separately



Dedicated Adaptor Plates.
PLP-V models
(For use with PLCK-1)



PLCK-1	SmartMount® Ceiling Mount with 1.5" NPS Coupler for up to 90" Displays
PLCK-UNL	SmartMount® Ceiling Mount with 1.5" NPS Coupler and Universal I-Shaped Adaptor for 32" to 90" Displays

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
PLCK-1	5.52" x 20.00" x 3.54" (140 x 508 x 90mm)	3.8lb (1.7kg)	150lb (68.2kg)	Powder Coat	Black
PLCK-UNL	24.38" x 25.82" x 4.03" (619 x 656 x 103mm)	9.0lb (4.1kg)			


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
PLCK-1	38.63" x 7.00" x 5.00" (981 x 178 x 127mm)	11.0lb (5.0kg)	735029248934	ACC109 1.5" NPS coupler, EXT018 extension column, PLCM-2 tilt box & instructions	1
PLCK-UNL	27.50" x 8.25" x 6.75" (699 x 210 x 171mm)	17.3lb (7.8kg)	735029248941	ACC109 1.5" NPS coupler, EXT018 extension column, PLCM-2 tilt box, PLP-UNL Universal I-Shaped Adaptor, mounting hardware & instructions	

Accessories

ACC, CMJ, DCS, DCT Models: Ceiling Plates
AEC Models: Adjustable Length Extension Columns
EXT Models: Fixed Length Extension Columns

PLP-V models: Dedicated Display Adaptor
PLP-UNM: Universal I-Shaped Adaptor for 22" to 50" Displays
PLCM-4: Stackable Tilt Box for up to 90" Displays
ACC450: Adaptor Bracket for up 22" to 40" Displays
ACC918: VESA® 75 x 75 & 100 x 100mm Security Fasteners for PLCK-1

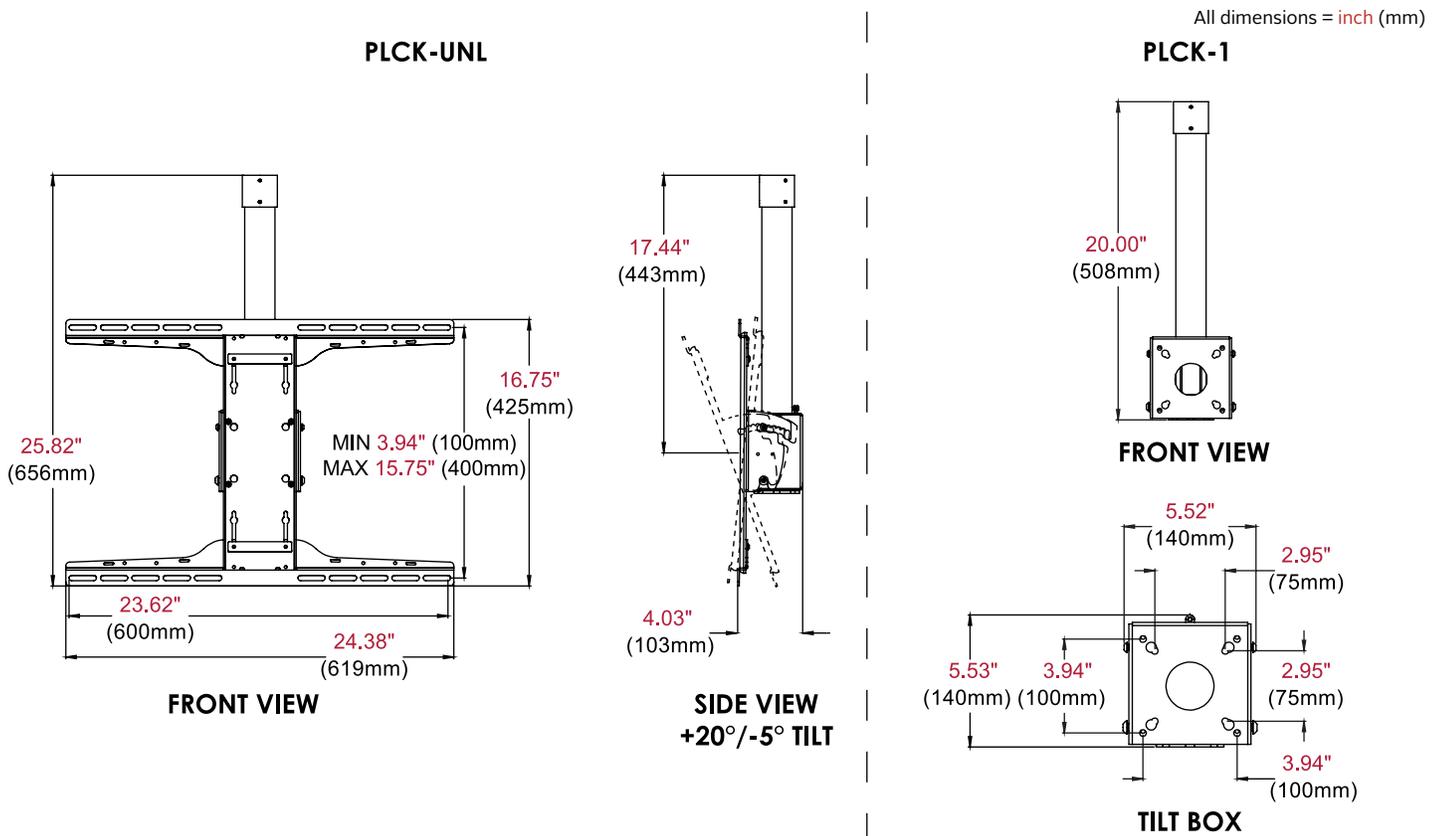

Architect Specifications

The Smartmount® Ceiling Mount shall be a Peerless-AV model PLCK-1 or PLCK-UNL and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
 2300 White Oak Circle
 Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
 Unit 3 Watford Interchange
 Colonial Way, Watford
 Herts, WD24 4WP
 United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
 Ave de las Industrias 413
 Parque Industrial Escobedo
 Escobedo, N.L.,
 Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

