

**Project:**

**Type:**

**Prepared By:**

**Date:**



UPC: 019813750675



### Features and Benefits

**REFLECTOR REPLACEMENT** - Replacement for incandescent and halogen R reflector lamps

**ENERGY SAVINGS** - Save up to 85% on energy

**25,000-HOUR LIFESPAN** - Long-life product

**DAMP RATED** - Suitable for damp locations

**ENCLOSED FIXTURE RATED** - May be used in both enclosed and open fixtures

**DIMMABLE** - Compatible with most common dimmer models

**SHATTERPROOF** - Plastic lamps for rugged applications

**110°+ BEAM ANGLE** - Wide beam angle for maximum light distribution

**80 CRI** - Ideal for general lighting applications

## Technical Specifications

### Technical Specifications

**Product Type:**

Reflector

**Bulb Shape:**

R20

**Wattage:**

7W

**Wattage Equivalency:**

50W Incandescent

**Typical Lumen Output:**

525

**Efficacy:**

75 lm/W

**Color Temperature:**

3000K Warm White

**CRI:**

80

**Base Type:**

E26

**L70 Lifespan:**

25,000 hours

**Operating Temperature:**

-20°C - 40°C

**Dimmable:**

Yes, down to 10%

**Beam Angle:**

110°

**Warranty:**

3-Year, No-Compromise Warranty

**For Use in Emergency Fixtures:**

No

**For Use Outdoors in Open Fixtures:**

No

**Electrical Characteristics**

**Input Voltage:**

120V

## Technical Specifications (continued)

### Electrical Characteristics

**Power Factor:**

0.9

**Flicker:**

<30%

### Listings

**UL Listed:**

Yes

### ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

**Energy Star ID:**

2329464

**CEC Status:**

Not lawful for sale in California


### Other

:

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
<b>CASE</b>	10	13.2	5.5	4.4
<b>PALLET</b>	2500	46.3	39.6	35.3

## Dimension

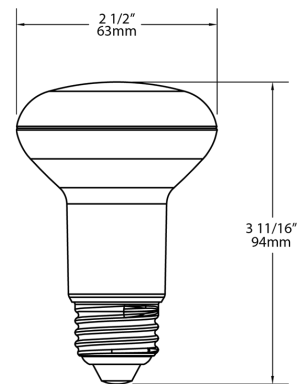

## Light Distribution

