

## Approach the Singularity

The Just Add Power 2GΩ/3G VGA Transmitter adds VGA input to the HD over IP (2G) and UltraHD over IP (3G) systems.

The 2GΩ/3G (2-G-Omega) VGA Transmitter is the first Just Add Power Transmitter that can be set for compatibility with either the 2G or 3G product lines.


Mix-and-match with other 3G Transmitters in 4K installations, or with other 2G Transmitters in 1080p installations.

**Build a future-proof video infrastructure.** Keep the switch, cabling, and driver! Add the VGA Transmitter to any Gigabit-based Just Add Power system.





Features	
Analog VGA video input	
Analog stereo audio input	
Control endpoints with RS232 & IR (IR control requires optional Flux Capacitor IR Dongle)	
Enhanced Video Wall supported	
Image Play – Push, Pull & Pop	
USB pass-through for KVM applications	


<b>Compliance</b>	RoHS/FCC/CE
<b>Operating Temp</b>	0-60 °C / 32-140 °F
<b>Supported Resolutions</b>	Typical VGA resolutions (4:3 or 16:9) up to 1920x1200
<b>Dimensions &amp; Weight</b>	184 x 30 x 126 mm 7.2" x 1.2" x 5.0" 0.45 kg / 1.0 lb
<b>Ports</b>	Gigabit Ethernet VGA In Stereo In 3.5mm RS232 w/ null modem Micro-USB
<b>Bandwidth</b>	60-180 Mbps
<b>Power Supply (not included)</b>	~4.7 – 23V 5.5mm/2.1mm, Positive tip
<b>PoE</b>	10 watts maximum

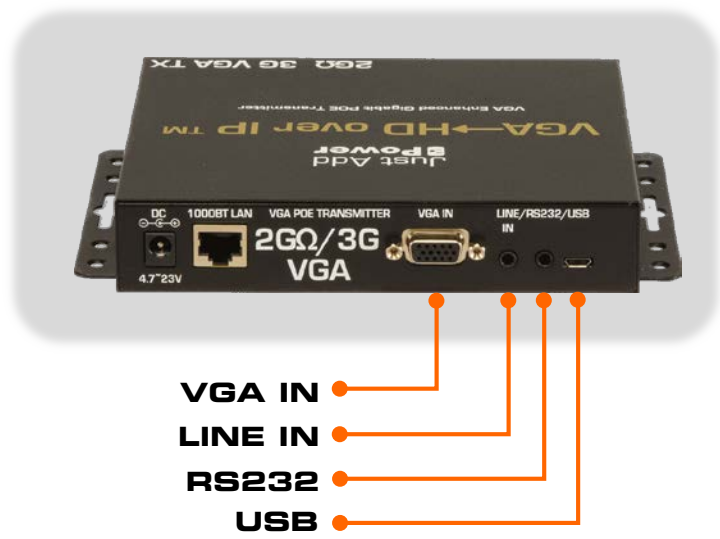

All measurements in millimeters (mm)

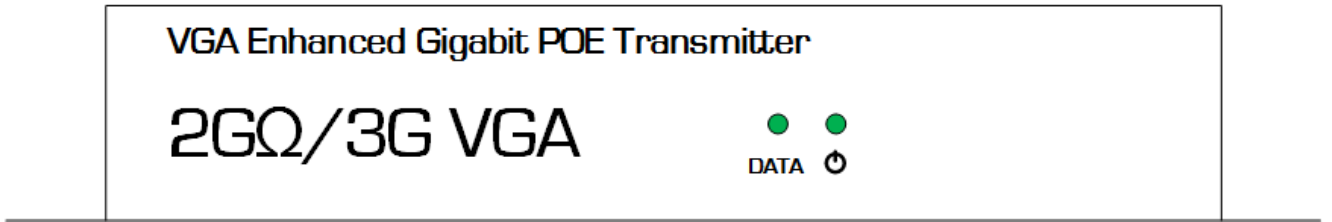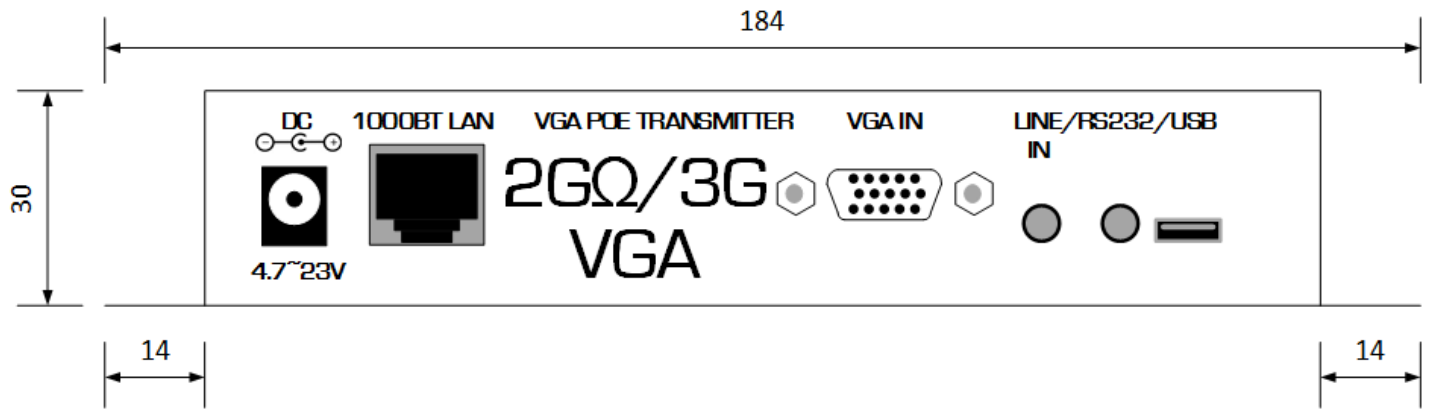

716VGA Front/Back

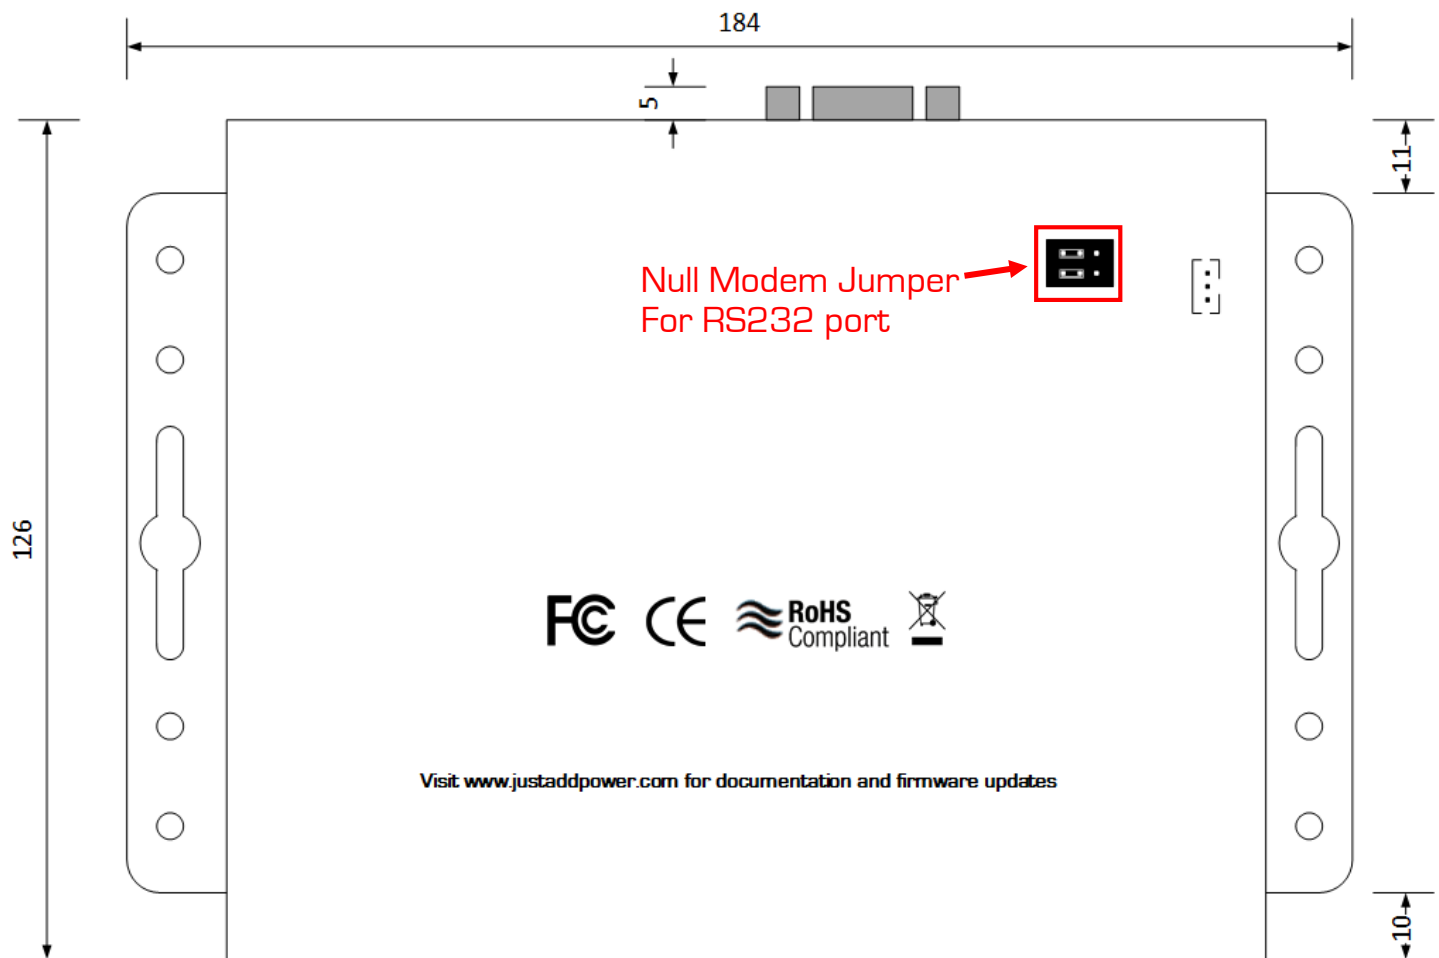

716VGA Bottom